



# IMB-Q770

microATX Motherboard Supports 22nm LGA1155 Intel® Core™ i7/i5/i3 CPU with Intel® Q77, DDR3, Three Independent Displays via Dual HDMI/DVI-I, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, Ten Serial Ports, HD Audio and RoHS

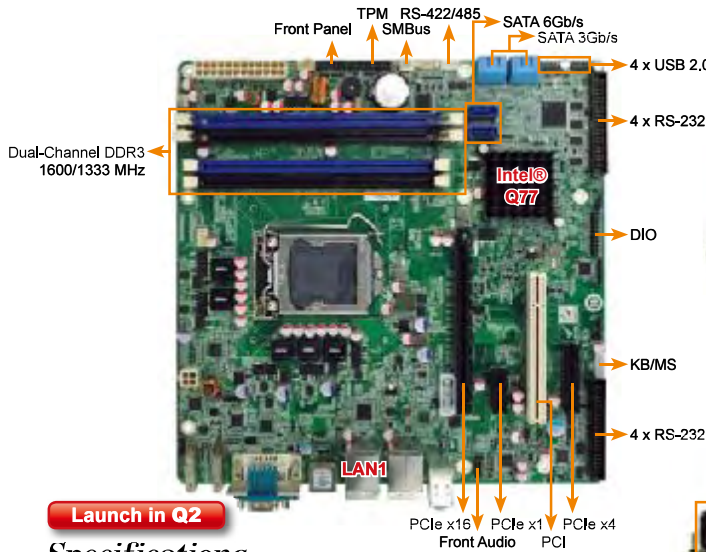

### LGA1156 CPU cross compatibility

This LGA1155 socket compatible with 3rd (IVB) and 2nd (SNB) CPU. It can get one year expanded product lifespan and the new technologies when you use backward 2nd CPU on Intel 7 series platform.

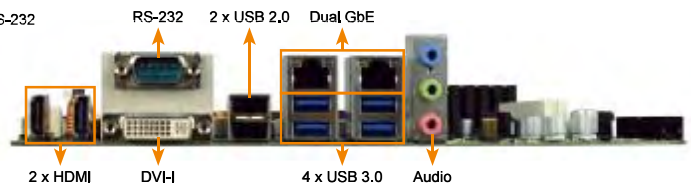


## Launch in Q2 Specifications

- ◆ CPU  
LGA1155 socket supports Intel® Core™ i7/i5/i3 quad/dual core processor
- ◆ System Chipset  
Intel® Q77
- ◆ Memory  
Four 240-pin 1600/1333MHz dual-channel DDR3 SDRAM unbuffered DIMMs supported (system max. 32GB)
- ◆ BIOS  
UEFI BIOS
- ◆ Ethernet  
Intel® 82583V PCIe controller  
Intel® 82579 PHY with Intel® AMT 8.0 supported
- ◆ Graphics Engine  
Intel® HD Graphics Gen 7 supports DX11 and OpenCL 1.1  
Full MPEG2, VC1, AVC Decode
- ◆ Display Output  
Dual HDMI integrated in the Intel® Q77  
DVI-I integrated in the Intel® Q77
- ◆ Super I/O  
Fintek F81866
- ◆ Audio  
Realtek ALC662 HD audio codec (Line-in, Line-out, Mic)
- ◆ I/O interface
 

9 x RS-232	1 x RS-422/485
4 x USB 3.0 (rear I/O)	6 x USB 2.0 (2 on rear, 2 by pin header)
4 x SATA 3Gb/s	2 x SATA 6Gb/s
- ◆ Front Audio  
2 x 5-pin header
- ◆ Front Panel  
1 x Front panel connector (power LED, HDD LED, speaker, power button, reset button)
- ◆ TPM  
2 x 10-pin header
- ◆ SMBus  
1 x 4-pin wafer
- ◆ I2C  
1 x 4-pin wafer
- ◆ Infrared Interface  
1 x 5-pin infrared by pin header
- ◆ Expansions
 

1 x PCIe x16 slot	1 x PCIe x4 slot
1 x PCIe x1 slot	1 x PCI slot
- ◆ Watchdog Timer  
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O  
24-bit Digital I/O (12-bit input, 12-bit output)
- ◆ Fan Connector  
1 x 4-pin CPU fan connector  
2 x 3-pin system fan connector
- ◆ Power Supply  
ATX power supply
- ◆ Power Consumption  
3.3V@0.31A, 5V@2.91A, 12V@0.51A, 12V@2.12A, -12V@0.10A  
(Intel® Core™ i3 3200 3.2GHz CPU with four 1333MHz 1GB DDR3 memory)
- ◆ Operating Temperature  
-10°C ~ 60°C
- ◆ Operating Humidity  
5% ~ 95%, non-condensing
- ◆ Dimensions  
244 mm x 305 mm
- ◆ Weight  
GW: 1200g/NW: 700g

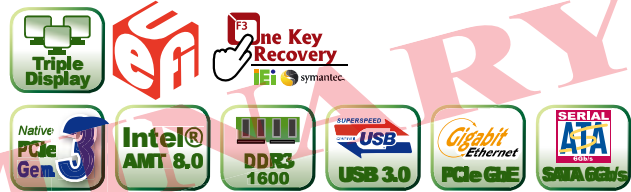

## Features

1. LGA1155 Intel® Core™ i7/i5/i3 processor supported
2. Dual-channel DDR3 1600/1333MHz supports up to 32GB
3. Intel® PCIe GbE with Intel® AMT 8.0 supported
4. Supports 3 displays with 2 displays in combination of HDMI, DVI and VGA
5. Supports PCI-Express generation 3.0 at 8GT/s I/O bandwidth
6. USB 3.0 and SATA 6Gb/s supported
7. Supports much scalable serial ports
8. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Packing List

1 x IMB-Q770 single board computer	
1 x DVI-I to VGA adapter (P/N: 33Z00-000031-RS)	
4 x SATA cable (P/N: 32801-000703-200-RS)	1 x Mini jumper pack
1 x I/O shielding	1 x Utility CD
1 x One Key Recovery CD	1 x QIG

## Ordering Information

Part No.	Description
IMB-Q770-R10	microATX motherboard supports 22nm LGA1155 Intel® Core™ i7/i5/i3 CPU with Intel® Q77, DDR3, three independent displays via dual HDMI/DVI-I, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, ten serial ports, HD Audio and RoHS
19800-003100-100-RS	Dual-port USB cable with bracket
32205-003800-100-RS	RS-422/485 cable, 200mm
19800-000051-RS	RS-232 cable, 230mm
32102-000100-200-RS	SATA power cable
19800-000075-RS	PS/2 KB/MS Y-cable with bracket, 220mm
CF-1156A-RS	High performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156B-RS	High performance LGA1155/LGA1156 cooler kit, 95W
CF-1156C-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
TPM-IN01-R11	20-pin Infineon TPM module, SW management tool, firmware V3.17