

Solid State Pressure Sensor


ANALOG
OUTPUT



CCD Series – Model 53A Low Pressure

FEATURES

- Dual-in-line Package
- Calibrated Span and Offset
- Multi-order Temperature Compensation
- Rigid Ceramic Package
- 0.15 PSI to 150 PSI
- Custom Configuration Upon Request

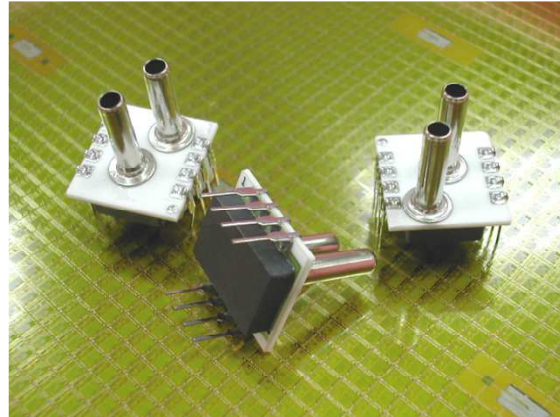

DESCRIPTION

The CCD 53A Series is a smart pressure sensor with a calibrated and amplified analog output. Compensation of sensor offset, sensitivity, temperature drift and nonlinearity is accomplished in the factory via the latest ASIC technology with calibration coefficients stored in an on-chip EEPROM.

A variety of output configurations, including response time and voltage levels are available to provide a simple and ready-to-use solution for a wide range of applications. The low voltage version operates from 2.7 to 3.3V while the regular version operates from 4.5 to 5.5V.

The CCD Series including Models 53 and 54, are available for pressure ranges from 0.15 psi to 150 psi. Custom ranges and calibrations are available. Please contact the factory for details.


Characteristics

Unless otherwise specified, all parameters are measured at 5V excitation, 25 °C and 60% RH

Parameters	Min	Typ	Max	Unit
Supply Voltage ^{Note 3}	2.7 to 3.3		4.5 to 5.5	V
Supply Current			2.5	mA
Pressure Range ^{Note4}	0.15		3.0	psi
Zero Output	0.412	0.500	0.588	V
Span Output		4.000		V
Accuracy ^{NOTE 1}			2.2	%FS
Response Time		1	2	ms
Linearity	-0.5		+0.5	%FS
Thermal Hysteresis	-0.15		+0.15	%FS
Over Pressure ^{Note 5}			3X or 2.5 psi	Rated Pressure
Temp - Compensated	0		+50	°C
Temp - Operating	-20		+85	°C
Temp - Storage	-40		+125	°C

- Notes:
- 1. Accuracy includes non-linearity, hysteresis, TCS and TCO inside the compensated temperature range, best fit straight line definition
 - 2. Wetted material contains Nickel, RTV, glass silicon and ceramic (Port A & B) and Au (Port A)
 - 3. Specify desired operating voltage range when ordering. Output is Ratiometric to Supply Voltage
 - 4. See ordering guide for list of available pressure ranges
 - 5. Which ever is higher

Dimensions:

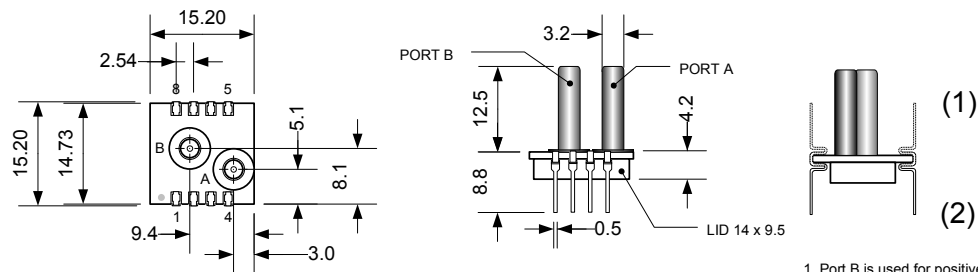


Pin #	Description
1	N.C.
2	VSS
3	OUT
4	Vdd
5	N.C.
6	N.C.
7	N.C.
8	N.C.

NOTE:
N.C. pins should be left floating
A 0.1 uF capacitor must be connected between Vss and Vdd

- 1. Port B is used for positive differential
- 2. Port A is used for absolute
- 3. Port B is used for gage
- 4. All dimensions are in mm
- 5. Solder reflow max. 250 °C 5s

Delivery : 17 pcs per tube

Ordering Information

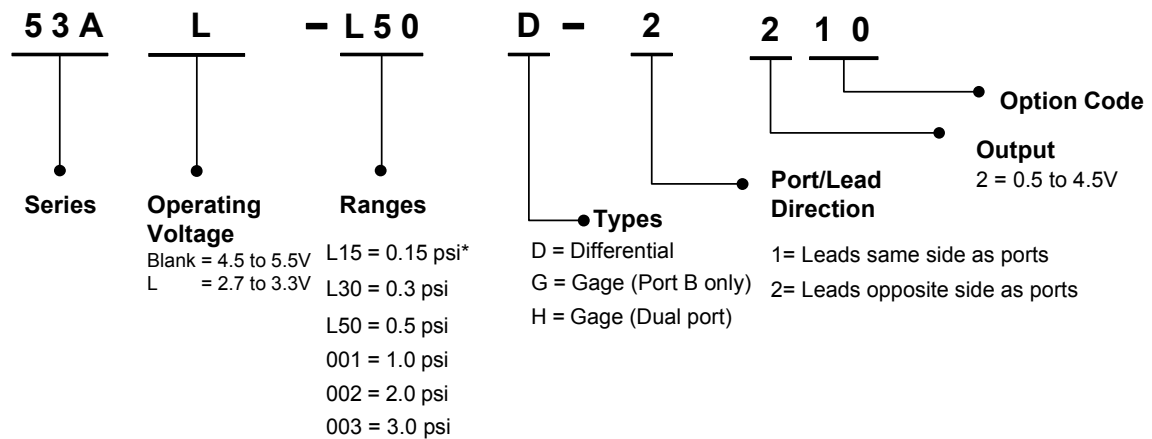

Note:

- 1) To specify differential single ended pressure (one side is always more +ve than the other) specify gage pressure with Dual port configuration. The device can be used for differential pressure by simply connecting the reference port (Port A) to the reference pressure instead of atmosphere.
- 2) Specifying Differential pressure means a +/- pressure range.
- 3) Custom outputs and pressure ranges available. Please contact us with your request.

Example:

Part number 53A L30 D 22 20 corresponds to an output of 2.5V (@ 0 psi) +/- 2V (@ +/- 0.3 psi)
 Part number 53A L30 G 22 20 corresponds to an output of 0.5V (@ 0 psi) to 4.5V (@ 0.3 psi) for gage applications only
 Part number 53A L30 H 22 20 corresponds to an output of 0.5V (@ 0 psi) to 4.5V (@ 0.3 psi) for gage or differential applications.

*For pressure range L15 (0.15 psi) the accuracy is 2.7% FS

Ver 1.6 16-Nov-10

We are here for you. Addresses and Contacts

Sales Switzerland & Liechtenstein

Matthias Rüegg
Ruhbergstrasse 32
CH-9230 Flawil

Phone +41 44 877 35 18
Mobile +41 76 491 66 66
Fax +41 44 877 35 19

matthias.rueegg@pewatron.com

Sales International Key Accounts

Peter Felder
Thurgauerstrasse 66
CH-8052 Zürich

Phone +41 44 877 35 05
Mobile +41 79 406 49 83
Fax +41 44 877 35 25

peter.felder@pewatron.com

Sales Germany

Postcode 10000–59999
Postcode 80000–99999

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone +49 89 260 38 47
Mobile +49 171 803 41 35
Fax +49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Postcode 60000–79999

Dieter Hirthe
Auf der Entenweide 4
69502 Hemsbach

Tel. +49 6201 508 9250
Mobil +49 1637 627 430
Fax +49 6201 508 9751

dieter.hirthe@pewatron.com

Sales Austria

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone +49 89 260 38 47
Mobile +49 17 18 03 41 35
Fax +49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Sales Other Countries / Product Management

Sensors

Physical Sensors
Data Acquisition

Thomas Clausen
Phone +41 44 877 35 13
thomas.clausen@pewatron.com

Geometrical Sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

Power Supplies

DC-DC Converters
Switching Power Supplies
DC-AC Inverters

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

E-Components

Current Sensors
Man Machine Interface
Measurement Probes

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

PEWATRON AG
Thurgauerstrasse 66
CH-8052 Zurich

Phone +41 44 877 35 00
Fax +41 44 877 35 25

www.pewatron.com
info@pewatron.com