


OPS500-520-H NEW

Open Pluggable Specification (OPS) 4K Digital Signage Player with LGA1151 socket 8th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® H310 and TPM 2.0

Features

- Intel® Open Pluggable Specification (OPS compliance)
- 8th gen Intel® Core™ i7/i5/i3 & Celeron® processor (Coffee Lake-S)
- 2 DDR4-2400 SO-DIMM, up to 32GB
- 1 M.2 KEY M for storage & 1 M.2 KEY E for Wi-Fi solution
- USB 3.1 & TPM 2.0 supported

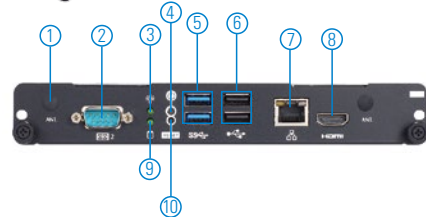

- | | | |
|---------------------|----------------------|------------------------|
| 1. Optional antenna | 6. USB 2.0 | 11. JAE TX-25A |
| 2. RS-232 | 7. LAN | 12. 12 VDC power input |
| 3. Power indicator | 8. HDMI 1.4b | |
| 4. Power button | 9. Storage indicator | |
| 5. USB 3.1 (Gen1) | 10. Reset | |




Specifications

CPU	LGA1151 socket 8th gen Intel® Core™ i7/i5/i3 and Celeron® processor, 35W TDP
Chipset	Intel® H310
System Memory	2 x 260-pin DDR4-2400 SO-DIMM, up to 32GB
Storage	1 x M.2 2280 SATA/PCIe for storage
Watchdog Timer	255 levels, 1 ~ 255 sec.
TPM	TPM 2.0
I/O	2 x USB 2.0 2 x USB 3.1 (Gen1) Type A 1 x RS-232 1 x 10/100/1000 Mbps Ethernet (Intel® i219-LM) 1 x HDMI with 4K resolution 1 x Power on/off button 1 x 12 VDC power input by adapter option 1 x Reset
JAE Connector	1 x DisplayPort with 4K 60Hz supported 1 x HDMI 2.0 with 4K 60Hz supported 2 x USB 2.0 1 x USB 3.0 1 x Audio (Line-out) 1 x UART (TX/RX)
Indicator	1 x LED for system power on 1 x LED for HDD active
Expansion Interface	1 x M.2 2230 KEY E for Wi-Fi Kit
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")
Packing Dimension	270 mm (10.63") (W) x 197 mm (7.76") x 70 mm (2.76")
Weight (net/gross)	1 kg (2.21 lb)/1.5 kg (3.3 lb)
Operating Temperature	0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)
Certification	CE, FCC Class A

Packing

- 1 x Driver CD
- 1 x Thermal grease
- 2 x M2 x5 screw
- 2 x M4 x6 screw

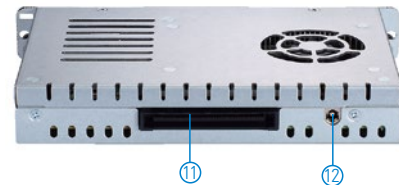

Optional OS Installation

Windows® 10 64-bit, Linux, AXView 2.0

Ordering Information

Standard

OPS500-520-H OPS 4K digital signage player with LGA1151 socket Intel® Core™ i7/i5/i3 & Celeron® processor, Intel® H310 and TPM 2.0

Optional

AX93197 OPS+ docking board with 4K @ 60Hz resolution
AX93190 OPS docking board with 4K @ 60Hz resolution

* Specifications and certifications may vary contingent on options.

Dimensions

