


Specification

95868

Delock industry USB WLAN 150 Mbps 5V module

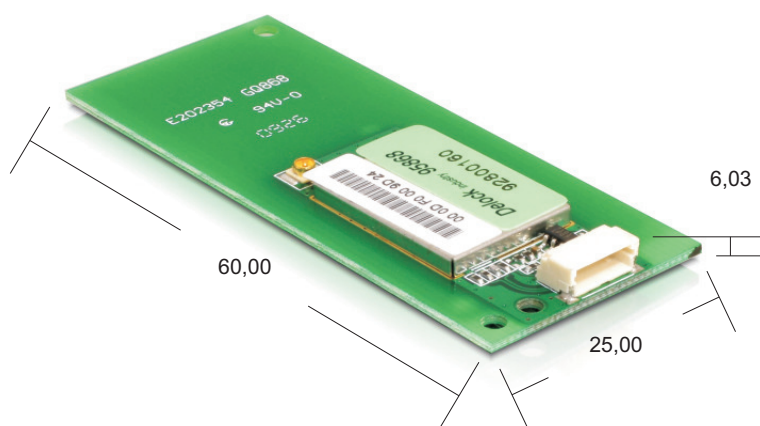

date: 11.05.2009

Specification

95868

Delock industry USB WLAN 150 Mbps 5V module

Contents:

- device overall description
- features
- specification compliance
- block diagram
- channel assignment
- security - certification
- RF specifications
- software & OS support
- operating conditions
- mechanic drawing
- antenna connector
- LED indication

Specification

95868

Delock industry USB WLAN 150 Mbps 5V module

Device Overall Description

The 95859 is designed to provide wireless LAN function on a small form factor with USB interface. The wireless LAN function is based on Ralink RT3070 MAC/BBP/RF controller and high gain power amplifier, fully comply with current draft IEEE 802.11n and IEEE 802.11 b/g standards.

Features

- Ralink RT3070 MAC/BBP/RF controller
- 1T1R modes
- 11b: 1,2,5.5,11Mbps
- 11g: 6,9,12,18,24,36,48,54Mbps
- 11n: legacy and high throughput modes, support 20/40MHz bandwidth MCS0~7(150Mbps PHY rate rate)
- reverse direction data flow and frame aggregation
- WEP 64/128, WPA, WPA2, TKIP, AES
- QoS-WMM, WMM-PS
- WPS, PIN, PBC
- multiple BSSID support
- low power with advanced power management

Specification


95868

Delock industry USB WLAN 150 Mbps 5V module

Specification compliance

- 802.11n Draft3.0
- 802.11b/g
- 802.11i
- 802.11e
- 802.11d
- 802.11h
- 802.11j
- USB2.0

Block diagram

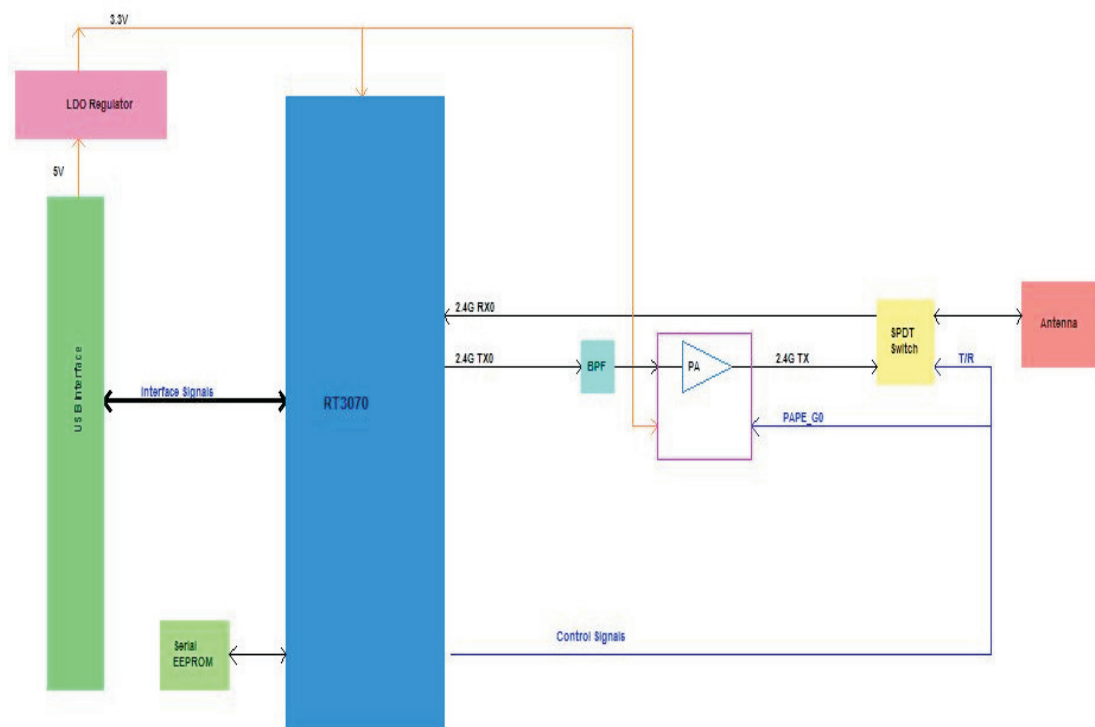

Specification

95868

Delock industry USB WLAN 150 Mbps 5V module

Channel assignment

2.4GHz channel support

Channel	FCC (US)	IC (CA)	ETSI (EU)	Japan JP)
1	x	x	x	x
2	x	x	x	x
3	x	x	x	x
4	x	x	x	x
5	x	x	x	x
6	x	x	x	x
7	x	x	x	x
8	x	x	x	x
9	x	x	x	x
10	x	x	x	x
11	x	x	x	x
12			x	x
13			x	x
14				x

KEY:

US = United States, CA = Canada, EU = European countries (except France and Spain) JP = Japan many countries and region are currently revising the channel assignment. X = Supported

Security

- complete security features - WEP 64/128, WPA, WPA2, 802.1x, and 802.11i
- Cisco CCS compliant

Certification

- Cisco CCX

RF Specifications

TBD

Specification

95868

Delock industry USB WLAN 150 Mbps 5V module

Software & OS support

operating system	driver
Windows 2000	available
Windows XP 32/64	available
Windows Vista 32/64	available
Windows CE 5.0/6.0	available
Linux	available
MAC OS	available

Operating conditions


voltage range	5,0V (± 0.5V)
operating temperature range	-10°C - 65°C
storage temperature range	-10°C - 85°C
relative humidity during operating	max. 95% (non-condensing)
relative humidity during storage	max. 95% (non-condensing)

Specification

95868

Delock industry USB WLAN 150 Mbps 5V module

Mechanical drawing

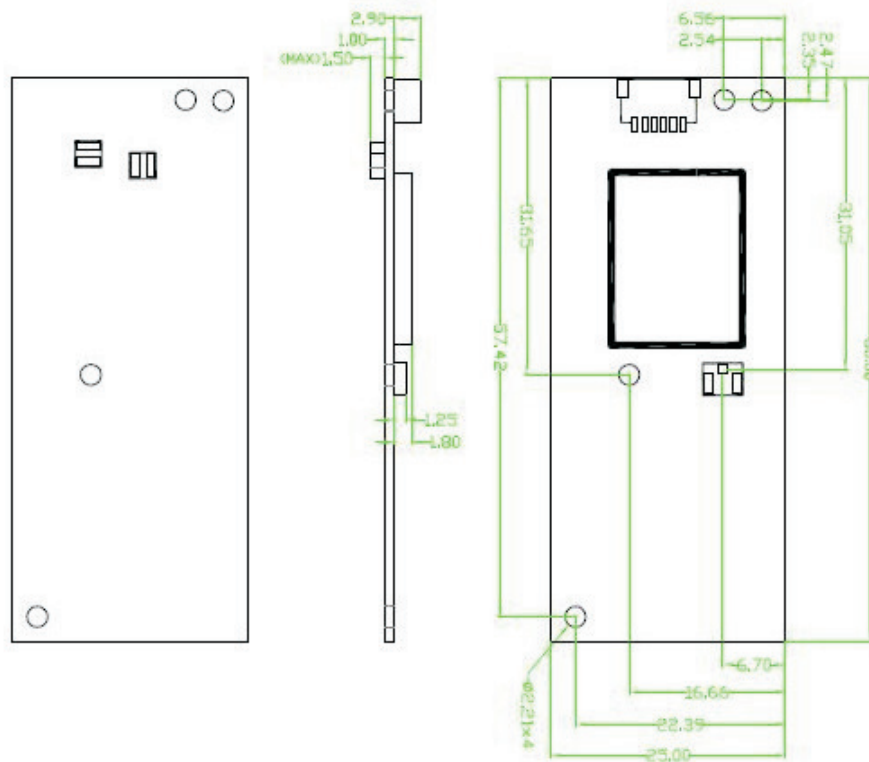

Specification


95868

Delock industry USB WLAN 150 Mbps 5V module

Antenna connector

Connector	Vendor	Part#
Antenna *1	Hirose	CL331-0471-0-10 (U FL-R-SMT), or compliance

Connector Status:

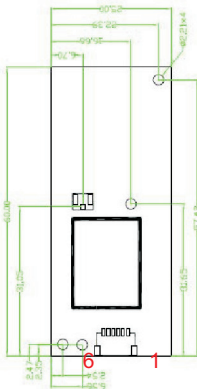

Host interface pin definition

1	Vcc 5V	2	USB Data -
3	USB Data +	4	GND
5	WLAN LED LINK	6	FAA pin: WLAN RF Disable/Enable

cable optional: Delock industry A95835



-host interface connector : 6 pin SMT Male USB connector

-connector product number (Male): 87213-0600L (connector Vender Aces Electronic CO., LTD.)

Note: Pin 5 is low active for WLAN LED link
Pin 6 is low voltage to disable RF function

Specification

95868

Delock industry USB WLAN 150 Mbps 5V module

LED status:

LED status	WLAN card activity
LED on	Associated, and authenticated but not transmitting or receiving
LED Slow Blink	Scanning for AP
LED Intermittent Blink	Activity proportional to transmitting/receiving speed
LED off	Radio off